

ONCE WHITE LED

2700K and 5000K | 230V

LIGHTING DESIGNED FOR ANIMALS

9W



High energy efficiency ~ 110 lm/w




Designed for tough barn environments



Dimmable from 1-100%



Simple 1:1 replacement with E27 fitting

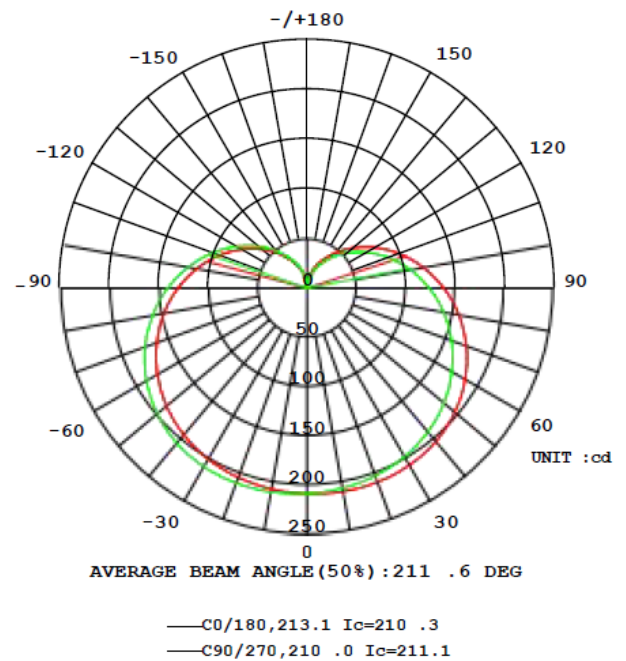

BEAM SPREAD

SPECIFICATIONS & ORDERING

 763-381-5621

Order code	1000001024	1000001030
Nominal power	9W (5000K)	9W (2700K)
Luminous flux - human photopic	1000 lm	
Initial LED luminaire efficacy	110 lm/W	
Input voltage	220-240 V	
Input frequency	50Hz/60Hz	
Driver included	Yes	
Surge protection	750 V	
Inrush current	1.127A	
Inrush time	0.071mS	
Power consumption tolerance	10%	
Power factor	0.8	
Beam angle	150 Degrees	
Warranty period	3 years	
HS code	8539520010	
Spectral Output and Dimming Specifications		
Dimmable	Yes, 1-100%	
Spectral Output	5000K	2700K
Operating and Mechanical Specifications		
Operating temperature	-10°C to 40°C / 14°F to 104°F	
Rated life	L70 25k hours	
Lens material	PC	
Housing material	PA	
Diameter	60 mm	
Height	116 mm	
Length	60 mm	
Width	60 mm	
Mount/adaptor and connection	E27 socket	
Control interface	Trailing edge dimming	
Product weight per piece	80g/0.176lbs	
Safety and Certifications		
CE Mark	Yes	
RoHS Compliant	Yes	
ECO energy classification	Class E	
IK and IP Rating	IK03 and IP65	

